

DS-KB2412T-IM

Four-Wire HD Video Intercom Kit



- HD TVI video quality
- Plug & play
- One-press to call
- One-press to unlock the door
- Max 2 door stations and 3 indoor stations in one system

▪ Specification


Video parameters	
FOV	Horizontal: 130°, Vertical: 70°
Supplement light	IR light, up to 3 m
Resolution	Stream resolution:1280 * 720@60fps
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
Device interfaces	
Lock control	1 relay, max 30V 1 A
Four-Wire interface	1
General	
Working temperature	-30 °C to 60 °C
Button	1
Installation	Surface mounting
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	50.94 mm × 135.94 mm × 20 mm (2" × 5.35" × 0.79")
Indicator	/
Power consumption	≤ 4 W
Protective level	/
Material	Plastic
Battery	/
Application environment	Indoor

▪ Available Model

DS-KB2412T-IM/DS-KIS212套装专用

DS-KB2412T-IM

▪ Dimension

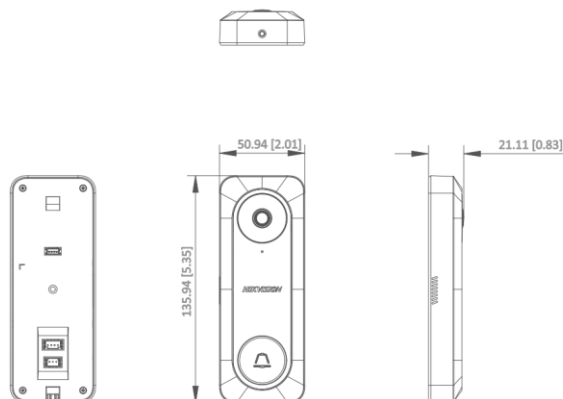

Unit:mm [inch]

SCALE 1:1

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq